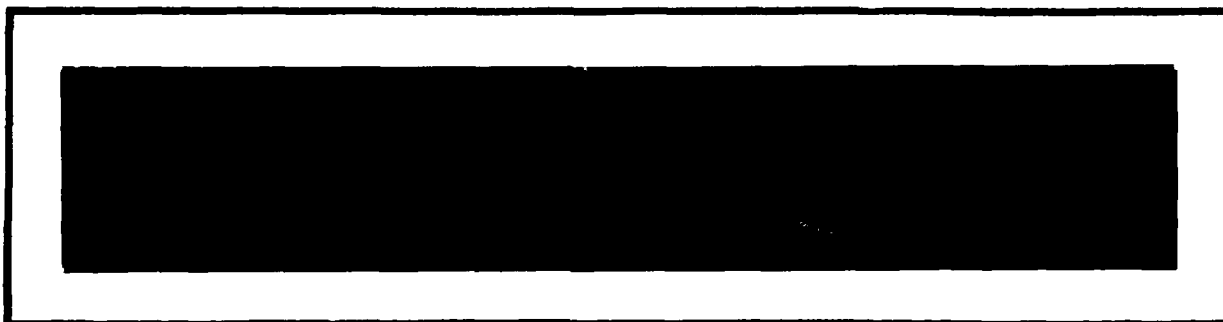


DTIC FILE COPY

②

AD-A217 094

 Axiomatix

DTIC
ELECTE
JAN 24 1990
S E D

DISTRIBUTION STATEMENT A
Approved for public release;
Distribution Unlimited

90 01 23 192

PACKET RADIO NETWORKS UNDER DYNAMIC JAMMING

Interim Technical Report

Andreas Polydoros

December 15, 1989

U. S. Army Research Office
P. O. Box 12211
Research Triangle Park, NC 27709-2211

Contract No. DAAL 03-87-C-0007

Axiomatix
9841 Airport Boulevard
Suite 1130
Los Angeles, CA 90045

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

DTIC
S ELECTE D
JAN 24 1990
E

APPROVED FOR PUBLIC RELEASE

The view, opinions, and/or findings contained in this report are those of the author(s) and should not be construed as an official department of the Army position, policy, or decision, unless so designated by other documentation.

Axiomatix Report No. R8912-1

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER ARO 24649.8-ZL-S	2. GOVT ACCESSION NO. NA	3. RECIPIENT'S CATALOG NUMBER NA
4. TITLE (and Subtitle) PACKET RADIO NETWORKS UNDER DYNAMIC JAMMING		5. TYPE OF REPORT & PERIOD COVERED Interim
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Andreas Polydoros		8. CONTRACT OR GRANT NUMBER(s) DAAL03-87-C-0007
9. PERFORMING ORGANIZATION NAME AND ADDRESS Axiomatix 9841 Airport Blvd., Suite 1130 Los Angeles, CA 90045		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS NA
11. CONTROLLING OFFICE NAME AND ADDRESS U. S. Army Research Office P. O. Box 12211 Research Triangle Park, NC 27709-2211		12. REPORT DATE December 15, 1989
		13. NUMBER OF PAGES 16
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) NA		
18. SUPPLEMENTARY NOTES The view, opinions and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy, or decision, unless so designated by other documentation.		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Adaptive Networks, Code-Division-Multiple-Access (CDMA), Communications, Networks, Dynamic Jamming, Packet Radio, Spread Spectrum.		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The purpose of this report is (a) to briefly review and classify the various research efforts developed so far in the broad area of Spread Spectrum (S₂) Random-Access Packet-Radio Networks (sometimes referred to as "Code-Division Random-Access" or CDRA) and (b) to point out certain directions that we perceive as being important to the Army, particularly in relation to the intelligent jamming of such networks. Furthermore, we will indicate the new areas and concepts that we wish to pursue further.		

DTIC
ELECTE
JAN 24 1990
S E D

TABLE OF CONTENTS

	<u>Page</u>
Introduction	1
A. COMMUNICATORS	2
(1). Number of Hops	2
(2). Connectivity	2
(3). TR/RCVR Format	3
(4). Code Distribution	4
(5). Physical-Level Modem Structure	5
(6). Buffering	5
(7). Access Protocol	6
(8). Centrality	7
(9). Network Functions	8
(10). Observables	8
(11). Input Traffic	9
B. JAMMER	10
(1). Waveform/Time/Space Profile	10
(2). Stationarity	11
(3). State Dependence	11
PROPOSED EXTENSIONS/RESEARCH DIRECTIONS	13
REFERENCES	15

INTRODUCTION

The purpose of this report is (a) to briefly review and classify the various research efforts developed so far in the broad area of Spread-Spectrum (S^2) Random-Access Packet-Radio Networks (sometimes referred to as "Code-Division Random-Access" or CDRA) and (b) to point out certain directions that we perceive as being important to the Army, particularly in relation to the intelligent jamming of such networks. In so doing, we will also put in perspective our efforts so far in this direction, under the auspices of the Army Research Office. Furthermore, we will indicate the new areas and concepts that we wish to pursue further.

We will start by outlining the various options and choices faced by the **COMMUNICATORS**, followed by those of the **JAMMER**. In each case, a thorough classification will be provided, along with a list of references that contain relevant material. Although we have tried to be as detailed as possible, the variety of available sources precludes us from being totally exhaustive in covering every possible reference. Also, there will be repetition of certain references in many cases, because they include material and assumptions that fall in more than one categories. For a good review of the various important aspects of CDRA, as applied to military packet radio, the following references can be consulted: [KaGrBuKu78], [Sass82], [Jubi85], [ShTo85], [Purs87], [Toba87], [PoSi87].

J	
1	
2	
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	
14	
15	
16	
17	
18	
19	
20	
21	
22	
23	
24	
25	
26	
27	
28	
29	
30	
31	
32	
33	
34	
35	
36	
37	
38	
39	
40	
41	
42	
43	
44	
45	
46	
47	
48	
49	
50	
51	
52	
53	
54	
55	
56	
57	
58	
59	
60	
61	
62	
63	
64	
65	
66	
67	
68	
69	
70	
71	
72	
73	
74	
75	
76	
77	
78	
79	
80	
81	
82	
83	
84	
85	
86	
87	
88	
89	
90	
91	
92	
93	
94	
95	
96	
97	
98	
99	
100	
101	
102	
103	
104	
105	
106	
107	
108	
109	
110	
111	
112	
113	
114	
115	
116	
117	
118	
119	
120	
121	
122	
123	
124	
125	
126	
127	
128	
129	
130	
131	
132	
133	
134	
135	
136	
137	
138	
139	
140	
141	
142	
143	
144	
145	
146	
147	
148	
149	
150	
151	
152	
153	
154	
155	
156	
157	
158	
159	
160	
161	
162	
163	
164	
165	
166	
167	
168	
169	
170	
171	
172	
173	
174	
175	
176	
177	
178	
179	
180	
181	
182	
183	
184	
185	
186	
187	
188	
189	
190	
191	
192	
193	
194	
195	
196	
197	
198	
199	
200	
201	
202	
203	
204	
205	
206	
207	
208	
209	
210	
211	
212	
213	
214	
215	
216	
217	
218	
219	
220	
221	
222	
223	
224	
225	
226	
227	
228	
229	
230	
231	
232	
233	
234	
235	
236	
237	
238	
239	
240	
241	
242	
243	
244	
245	
246	
247	
248	
249	
250	
251	
252	
253	
254	
255	
256	
257	
258	
259	
260	
261	
262	
263	
264	
265	
266	
267	
268	
269	
270	
271	
272	
273	
274	
275	
276	
277	
278	
279	
280	
281	
282	
283	
284	
285	
286	
287	
288	
289	
290	
291	
292	
293	
294	
295	
296	
297	
298	
299	
300	
301	
302	
303	
304	
305	
306	
307	
308	
309	
310	
311	
312	
313	
314	
315	
316	
317	
318	
319	
320	
321	
322	
323	
324	
325	
326	
327	
328	
329	
330	
331	
332	
333	
334	
335	
336	
337	
338	
339	
340	
341	
342	
343	
344	
345	
346	
347	
348	
349	
350	
351	
352	
353	
354	
355	
356	
357	
358	
359	
360	
361	
362	
363	
364	
365	
366	
367	
368	
369	
370	
371	
372	
373	
374	
375	
376	
377	
378	
379	
380	
381	
382	
383	
384	
385	
386	
387	
388	
389	
390	
391	
392	
393	
394	
395	
396	
397	
398	
399	
400	
401	
402	
403	
404	
405	
406	
407	
408	
409	
410	
411	
412	
413	
414	
415	
416	
417	
418	
419	
420	
421	
422	
423	
424	
425	
426	
427	
428	
429	
430	
431	
432	
433	
434	
435	
436	
437	
438	
439	
440	
441	
442	
443	
444	
445	
446	
447	
448	
449	
450	
451	
452	
453	
454	
455	
456	
457	
458	
459	
460	
461	
462	
463	
464	
465	
466	
467	
468	
469	
470	
471	
472	
473	
474	
475	
476	
477	
478	
479	
480	
481	
482	
483	
484	
485	
486	
487	
488	
489	
490	
491	
492	
493	
494	
495	
496	
497	
498	
499	
500	
501	
502	
503	
504	
505	
506	
507	
508	
509	
510	
511	
512	
513	
514	
515	
516	
517	
518	
519	
520	
521	
522	
523	
524	
525	
526	
527	
528	
529	
530	
531	
532	
533	
534	
535	
536	
537	
538	
539	
540	
541	
542	
543	
544	
545	
546	
547	
548	
549	
550	
551	
552	
553	
554	
555	
556	
557	
558	
559	
560	
561	
562	
563	
564	
565	
566	
567	
568	
569	
570	
571	
572	
573	
574	
575	
576	
577	
578	
579	
580	
581	
582	
583	
584	
585	
586	
587	
588	
589	
590	
591	
592	
593	
594	
595	
596	
597	
598	
599	
600	
601	
602	
603	
604	
605	
606	
607	
608	
609	
610	
611	
612	
613	
614	
615	
616	
617	
618	
619	
620	
621	
622	
623	
624	
625	
626	
627	
628	
629	
630	
631	
632	
633	
634	
635	
636	
637	
638	
639	
640	
641	
642	
643	
644	
645	
646	
647	
648	
649	
650	
651	
652	
653	
654	
655	
656	
657	
658	
659	
660	
661	
662	
663	
664	
665	
666	
667	
668	
669	
670	
671	
672	
673	
674	
675	
676	
677	
678	
679	
680	
681	
682	
683	
684	
685	
686	
687	
688	
689	
690	
691	
692	
693	
694	
695	
696	
697	
698	
699	
700	
701	
702	
703	
704	
705	
706	
707	
708	
709	
710	
711	
712	
713	
714	
715	
716	
717	
718	
719	
720	
721	
722	
723	
724	
725	
726	
727	
728	
729	
730	
731	
732	
733	
734	
735	
736	
737	
738	
739	
740	
741	
742	
743	
744	
745	
746	
747	
748	
749	
750	
751	
752	
753	
754	
755	
756	
757	
758	
759	
760	
761	
762	
763	
764	
765	
766	
767	
768	
769	
770	
771	
772	
773	
774	
775	
776	
777	
778	
779	
780	
781	
782	
783	
784	
785	
786	
787	
788	
789	
790	
791	
792	
793	
794	
795	
796	
797	

A. COMMUNICATORS

The possibilities associated with the network users, from now on collectively referred to as the "communicators", are the following:

(1). Number of Hops:

The network under consideration, consisting of a collection of modems (nodes), can either be of the *Monohop* or the *Multihop type*. In the first case, messages are to be transmitted only one hop away, implying that all source/destination pairs are within hearing distance from each other; otherwise, there will be more than one hop required to transfer a message from a source to a destination, leading to the multihop scenario and the associated routing issues. We note that the number of required hops is one facet of the important notion of **network topology**, others being the "connectivity" and the "modem availability", as described below. References on the topic include [SiKl83], [SiLe83], [SuLi85], [Toba87], [PoSi87], [Chen87].

(2). Connectivity:

A multi-node network can be either *Fully-Connected* or *Partially-Connected*. A fully-connected network means that every node can hear every other node, although not necessarily with the same quality. Typically, however, the notion of full connectivity implies that there is a direct link between any source and any destination which, in the absence of excessive multi-user noise and/or jamming, would be capable of sustaining communication. A prerequisite for full connectivity is a monohop network; when the network under consideration is multihop, it is necessarily partially connected, exactly because there is at least one source/destination pair that cannot communicate directly. However, there exist monohop networks that are not fully connected. An example can be found in Fig 1(a), whereas Fig.1(b) shows how the same node collection of TRs and RCVRs can be connected fully. Most of the references in [PoSi87] are about full connectivity (see also the models and references in [Purs86], [PrPo87], [StFo89]). An

example of a partially connected monohop network can be found in [SuLi84].

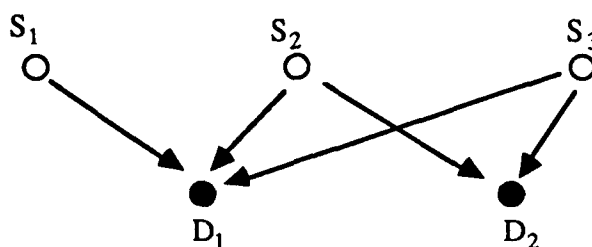


Figure 1(a). An example of a monohop, partially-connected network.

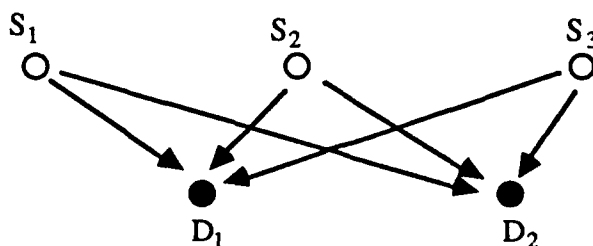


Figure 1(b). An example of a monohop, fully-connected network.

(3). TR/RCVR Format:

The issue here is whether TRs and RCVRs act in a *dedicated* or *non-dedicated* fashion. A dedicated TR or RCVR performs just the respective function and no other. Contrary to that, a non-dedicated modem switches between the two functions according to some prespecified protocol. The latter case is more commonly known as the *half-duplex* case. Here, the modem can have a TR- mode priority or a RCVR- mode priority, depending on which function is preferred over the other at a particular point in time. Such a conflict can be of particular importance in unslotted system operation, where the need for a transmission and a reception job for a particular modem can overlap in time. In slotted operation, this issue is resolved rather easily: whenever an active transmission is scheduled in a slot, the modem switches to its TR mode. In all other (non-transmitting) slots, it remains an "active" RCVR (see below for terminology).

It is sometimes thought (erroneously) that the opposite of the half-duplex case is the *full-duplex* one, whereby a modem can perform both functions simultaneously. In other words, a unit consists of a separate TR plus a RCVR at the same time. In reality, however, the full-duplex case is just a special example of the dedicated scenario. To explain this further, we should distinguish between the concepts of *potential* and *active* TRs or RCVRs. Any unit that *can* and, at some time, *will* transmit, belongs to the set of "potential" TRs, whose size is fixed at N_T ; the same goes for potential RCVRs (fixed size N_R). The term "active" is reserved for those units which indeed act in either capacity at a particular slot. For a random access model, the number of *active* TRs in any slot is a random variable denoted by M_T ; thus, in general, M_T will be different than N_T . On the other hand, the picture regarding the number of active RCVRs is a bit more complicated: if the network is built with dedicated TRs and RCVRs, then *active* and *potential* RCVRs are identical notions, i.e., $M_R = N_R$. A satellite random-access application with many receiving beams would mostly fit in this category, as would a hierarchical type of network with devoted or "central" nodes/repeaters, whose only job is to receive messages at all times. If the units are non-dedicated, then obviously the number of active RCVRs is itself a random variable, and the equality $M_T + M_R = U$ holds. Within this framework, *full-duplex* units correspond to a special case of dedicated networks where the total number of units $U = N_T = N_R$, each including a potential TR and RCVR. In general (i.e., for an arbitrary network), N_T will not equal N_R ; this is the case, for instance, in the single-star or connected-star topology. References on this topic include [SuLi85], [PoSi87], [PrPo87], [PoCh89].

(4). Code Distribution:

As explained in [Purs87], [PoSi87], [SoSi88], the networks can employ either a *common code*, a *TR-based* or a *RCVR-based* code system. *Hybrids* of those are also possible, wherein one set of codes are used in the synchronization preamble (such as a common code heard by all or a RCVR-based code for the destination of a particular

packet), and then another is used in the data portion (for instance, a TR-based code). Code distribution also affects the overall network topology, as detailed in [PoSi87].

(5). Physical-Level Modem Structure:

This refers to the particular choice of the *modulation/FEC coding/spreading* combination. Coherent or differentially coherent modulations are preferred with DS spreading, whereas noncoherent modulations, such as MFSK, are typical for FH. As of now, slow FH (at most one hop per encoded symbol) seems to be the design choice, although fast frequency-hopping might become a reality soon, as fast frequency synthesizers become more widely available. Both block and convolutional coding are used with DS, whereas the standard choice for FH seems to be the Reed-Solomon code (see details on the SINCGARS radio discussed in [Purs 87]).

With regard to the coding choice, we should distinguish between fixed and adaptive coding schemes. In the latter case, which might be incorporated into the design for the purpose of mitigating the effects of temporally and/or spatially selective jamming (such as the on-off type), we distinguish further between TR-adaptivity, where the FEC rate is adjusted to the channel conditions [KePo87], and the RCVR-adaptivity, such as the code-combining techniques [KePo89].

Another important option of adaptivity pertains to power-control, where the transmission radii are adjusted according to the channel conditions. This issue is not well understood yet, and is intimately connected to the concept of topology-adaptivity: as an example, the network connectivity might be adjusted according to the jamming threat, switching from a monohop, fully-connected network to a multihop one over time.

(6). Buffering:

This regards the issue of whether the different nodes in the network contain *buffers* which store packets before transmission, or are with *no buffer*. In the former case, the buffer is either modeled as having finite or infinite capacity. This buffering capability is

important for the following two reasons: (a) storing newly generated packets before their first attempted transmission, or transient packets on their way to a final destination (that is when the node acts as a relay in a multihop network), and (b) storing packets that have failed their first transmission and are scheduled to be retransmitted (the so called *backlogged* packets). In the case of no buffering, transmitters are modeled as always *busy* (never *idle* with an empty buffer), implying that they are either in the *originative* mode (with a new packet) or in the *backlogged* mode. The following Fig. 2 provides a detailed diagram for the different modes that a modem can be in, as well as the associated nomenclature that we have adopted. The issue of buffer occupancy has been addressed extensively in [Chen87], extending the models of [SiLe83], [SuLi85]. An analysis of interacting queues can be found in [EpZh87], but not for CDRA.

(7). Access Protocol:

This refers to the way that a modem accesses the common spread channel. In Random Access, which has been the main feature in this packet radio under consideration, accessing is achieved with probabilistic means: an available packet will be transmitted in a specific slot with a certain probability p , which can be different for first transmission versus the re-transmission of a backlogged packet. If such a distinction is not made and all packets are transmitted with the same probability, we call it an *uncontrolled access protocol*, the opposite of which is *controlled accessing*. In the latter case we distinguish between static control and adaptive control techniques. For static control, the new-packet transmission probability is denoted by p_0 , whereas the backlogged-packet transmission probability is denoted by p_r . Both p_0 and p_r are fixed throughout the system operation, although they can be chosen optimally [KlLa75], [DaGr80], [Rayc81], [PoSi87], [Chen87], [PrPo87], [PoCh89]. Contrary to that, the probability p_r changes continuously with time in the "adaptive-control" case, according to some channel observables (traffic levels, jamming etc.) [Haje82].

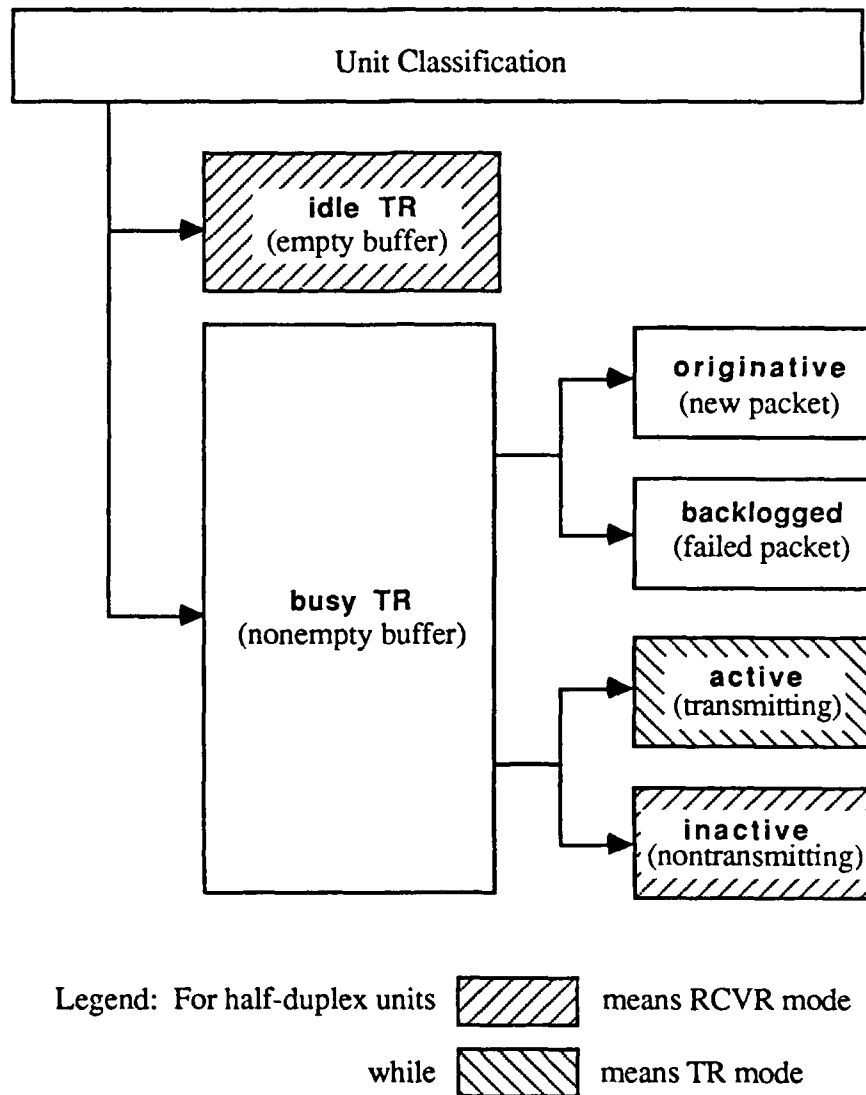


Figure 2. General classification of packet-radio unit status.

(8). Centrality:

In a large network where routing, connection and topology- setup, flow control and other network- management decisions have to be made, the burden of such decisions can either be assigned to specific central nodes, or it can be done collectively with all nodes participating. The first type of network falls under the *centralized* category, while the second type is referred to as a *decentralized* network. There can also be hybrid cases

which imply a hierarchical structure: some nodes have a higher decision and organizational responsibility than others, although all nodes possess some degree of decision-making capability.

(9). Network Functions:

Among the many functions that a complex network must perform [KaGrBuKu78], we only mention here the following three: *routing*, *flow-control* and *information-exchange* [Chen87]. "Routing" refers to the task of finding the appropriate path(s) for a packet to follow from source to destination, and can be classified as deterministic, probabilistic and dynamic. In the first case, paths are fixed between each source/ destination pair. Furthermore, a deterministic routing algorithm can be of the single-path or diversity variety, depending on the number of paths that the same packet is sent through, in order to reach the destination. Probabilistic routing chooses the paths in a stochastic way in order to avoid deterministic obstacles and bottlenecks. However, the probabilistic law is typically stationary, i.e., it is not changing with time. Contrary to that, dynamic routing is concerned with finding the best routes in a dynamically changing environment, and utilizing those in a deterministic way. For the nodes to be able to find those best paths; however, they must be able to continuously monitor the quality of the channels and to exchange that information amongst themselves. This is where the notion of "information exchange" comes into play, with the associated issues of the frequency of exchanges, the types of messages exchanged, the choice of channel observables (see below) etc. On the other hand, "flow-control" is typically associated with dynamic procedures: the users adjust their accessing to the link (they control the flow of information into it) by reacting to the perceived level of congestion or channel quality, within a specific window of time.

(10). Observables:

The issue here is to identify the appropriate channel-quality monitoring schemes, whose conclusions are to be shared among nodes during the information exchange

sessions. Typical such measures are the channel signal-to-noise ratio (SNR), the bit- or word- or packet-error rate over some observation interval, the number of retransmissions required to send a packet successfully, etc. These are obviously not unrelated statistics, and the selection of a proper subset of those upon which to base a channel-quality estimate (CQE) is an important open issue.

(11). Input Traffic:

The traffic requirements of a particular network, i.e., the amount of packets per second (or per slot) that the network can support on the average, is an external specification, much like the physical deployment of nodes in space. The nature of traffic is mostly a modeling issue, having to do with how traffic is being generated at the various nodes. As such, it is closely related to certain flow-control considerations. This traffic is the combined stream of new (original) packets as well as transient packets, as discussed above. The two immediate issues affecting performance evaluation are the *statistics* of the traffic and its *priority level*. With regard to statistics, typical models are the Bernoulli (for finite-user models) and the Poisson (for very large or infinite user-models). On the other hand, the notion of "prioritized traffic" refers to the case of integrated services, where both digitized voice and data are to be transported through the network. Such integration imposes different constraints on these heterogeneous traffic sources: voice can tolerate higher error rates (up to 10^{-3} bit-error-rates are typical for digitized voice), but it is very stringent on the delay requirements. For data transfer, these constraints are effectively reversed. The appropriate design of a secure, anti-jam network under such a mixture of requirements is an open issue.

B. JAMMER

Some of the choices related to the jammer's degrees of freedom are outlined below. Again, the list is not exhaustive, but it contains aspects that either have been, or will be addressed in the near future. As the project advances and other important parameters emerge, they can be incorporated in the list. Let us note that we deal here mostly with jammers that incorporate some minimal degree of randomness in their attack (stochastic jamming), for otherwise they would eventually become totally predictable: this would allow the network to perform its functions around them, thus rendering them ineffective. This randomness can vary from the simplest (random epoch of a periodic jammer), to the most advanced choices of the probabilistic jamming law. At this point, we make the assumption that the users cannot predict the jamming action (through, say, some advanced learning mechanism), but they can try to react to it adaptively once they sense it.

(1). Waveform/Time/Space Profile:

The most familiar jamming alternatives evolve around the particular signature of the jamming *waveform*. Thus, we talk about tone-jamming versus noise-jamming, partial-band versus full-band jamming, on-off (namely, two-level) versus multi-level jamming etc. [SiOmScLe85].

Another important feature is the *temporal* profile of the jammer, particularly in connection to the basic time-unit of the network, i.e., the slot-length. Here, as specific examples which do not exhaust all possibilities, we distinguish between the long-term, the Markovian and the slot-by-slot independent jammer [PrPo87]. In the first case, the jammer chooses very long blocks of time-intervals for its jamming actions, and the network is allowed to reach a dynamic equilibrium within each such block of time. In the Markovian case (another particular example within the jammer's probabilistic choices), these block-lengths are chosen according to a specific Markovian distribution. The last case of slot-by-slot independence implies that the jammer decides independently for every slot whether to

jam or not. In all cases, a dominant parameter is the *temporal duty cycle* p_t , which quantifies in a coarse way the jamming options.

Finally, from a *spatial* viewpoint, the jammer has at his discretion the portion (fraction) of the total network that he chooses to jam [PoCh89]. This can either be a fixed fraction (a special case of which is "full-space" or "blanket" jamming) or a random fraction in each slot. In either case, a dominant parameter is the *spatial duty cycle* p_s , defined as the average portion of the total number of nodes jammed over time. This parameter provides a simplified quantification of the spatial options of the jammer, and it is a dual concept to p_t . In general, a complete description of the probabilistic jamming strategy requires the specification of the joint probability-mass distribution function of the jamming action over all nodes [PoCh89].

(2). Stationarity:

Any stochastic process is either *stationary* (time-invariant) or *nonstationary* (time-varying), depending on whether its probabilistic description changes over time or not. A stochastic jamming process is no exception, and this distinction applies here too. In the time-varying case we also distinguish between periodic and aperiodic jamming strategies [Chen87].

(3). State Dependence:

This refers to whether the jammer adapts his strategies to certain channel measurements (see below), which provide him with some measure of the network state. If the jammer acts independently of any observations (i.e., if he is *state-independent*), we refer to him as a *static* jammer. If he does take into account these measurements (i.e., the actions at each point in time are *state-dependent*), we call him *dynamic*. Note that the distinction between "static" and "dynamic" is independent of the time-variability of the jammer: either one can be stationary or nonstationary, as defined above.

(4). Observables:

The actions of an adaptive (dynamic) jammer will depend on the values of certain chosen observables, much like the communicators' actions are modified by their own observables. Such candidates for jamming observables of the network status are the *traffic intensity* on the different monitored links, the *power level* employed by the users (in response to SNR and connectivity requirements), the *packet length* etc. The effectiveness of each of those observables is currently unknown.

Proposed Extensions/ Research Directions

We outline below some of the topics that we propose to examine, in the course of our continuing effort in this area under the sponsorship of the ARO.

1. Impact of partial connectivity in a monohop scenario versus the jamming strategy. Note that [PoSi87] and [PoCh89] dealt with fully connected monohop nets only.
2. Impact of FEC code-design for a FH radio versus the jamming spatial and temporal duty cycle.
3. Understand the ramifications of topology-adaptivity in response to a temporally and/or spatially selective jamming threat. This involves adjustments in possibly all the facets of network topology, such as the mono/multi-hop choice, full- versus partial-connectivity in the monohop case, dedicated versus half-duplex operation, and code distribution. This would entail an analytical understanding of the network performance in each stage of the topological transformation, as well as the dynamic aspects of the transition.
4. Perform a thorough examination and comparison of the various statistics that can be employed as measures of the channel quality for the communicators. Candidates for these channel-quality estimates (CQE) include the channel signal-to-noise ratio (SNR), the bit- or word- or packet-error rate over some observation interval, the number of retransmissions required to send a packet successfully, etc. In view of the fact that these are not independent statistics, the question is which ones (or what combination thereof) provides a reliable and concise description of the channel state at any point in time. The exact same issue should be addressed from the jammer's viewpoint, where the observables would now include the traffic activity (intensity) and the power level on the various monitored links, possibly the length of each transmission etc.
5. Examine appropriate design alternatives for a secure, anti-jam network under a mixture of requirements, pertaining to heterogeneous traffic sources such as digitized voice and data. This will include the possibility of different coding, accessing and routing choices for the different types of traffic, in order to accommodate the very

different error-rate/delay requirements for each of them.

6. Examine the interaction between adaptive users and adaptive jammers, namely, analyze the situation where both parties' actions depend on channel observables.

References

- [Chen87] U. Cheng, "Static and Dynamic Jamming of Networks," Interim Technical Report No. R8712-6, Axiomatix Corp., Dec. 1987.
- [DaGr80] D. H. Davis and S. A. Gronemeyer, "Performance of Slotted ALOHA Random Access with Delay Capture and Randomized Time of Arrival," *IEEE Transactions on Communications*, Vol. COM-28, No. 5, May 1980, pp. 703 - 710.
- [EpZh87] A. Ephremides and R. Zhu, "Delay Analysis of Interacting Queues with an Approximate Model," *IEEE Transactions on Communications*, Vol. COM-35, No. 2, February 1987, pp. 194 - 201.
- [Haje82] B. Hajek, "Recursive Retransmission Control: Application to a FH Spread-Spectrum System," *Proceedings CISS, Princeton*, 1982, pp. 116-120.
- [Jubi85] J. Jubin, "Current Packet Radio Network Protocols," *Proceedings of INFOCOM '85*, April 1985, pp. 86 - 92.
- [KaGrBuKu78] R. Kahn, S. Gronemeyer, J. Burchfiel, and R. Kunzeman, "Advances in Packet Radio Technology," *Proc. IEEE*, vol. 66, November 1978, pp. 1468 - 1496.
- [KePo87] T. Ketseoglou and A. Polydoros, "Spread-Spectrum Random Access Monohop Networks With Adaptive Packet Protection," *Proceedings of CDC'87*, Los Angeles, CA, Dec. 1987, pp. 717-720.
- [KePo89] T. Ketseoglou and A. Polydoros, "Code Combining With Convolutional Coding and Sequential Decoding for CDMA Slotted Networks," to be presented at the *1990 Symposium on Information Theory*, San Diego, CA, Jan. 1990.
- [KilLa75] L. Kleinrock and S. Lam, "Packet Switching in a Multiaccess Broadcast Channel: Performance Evaluation," *IEEE Trans. Comm.*, Vol. COM-23, April 1975, pp. 410 - 423.
- [PoSi87] A. Polydoros and J. Silvester, "Slotted Random Access Spread-Spectrum Networks," *IEEE Journal on Selected Areas in Comm.*, Vol. SAC-5, No. 6, July 1987, pp. 989 - 1002.
- [PrPo87] N. Pronios and A. Polydoros, "Spread-Spectrum, Slotted-ALOHA, Fully-Connected Networks in Jamming," submitted to *IEEE Trans. Comm.*; see also preliminary version in MILCOM '87.
- [PoCh89] A. Polydoros and U. Cheng, "Topology-Selective Jamming of Fully-Connected, CDRA Networks," Interim Technical Report No. R8906-3, Axiomatix Corp., Dec. 1987; also, submitted to *IEEE Trans. Comm.*

- [Purs86] M. B. Pursley, "Frequency-Hop Transmission for Satellite Packet Switching and Terrestrial Packet Radio Networks," *IEEE Transactions on Information Theory*, Vol. IT-32, No. 5, September 1986, pp. 652 – 667.
- [Purs87] M. B. Pursley, "The Role of Spread Spectrum in Packet Radio Networks," *Proceedings of the IEEE*, Vol. 75, No. 1, January 1987, pp. 116 – 134.
- [Rayc81] D. Raychaudhuri, "Performance Analysis of Random Access Packet-Switched Code Division Multiple Access Systems," *IEEE Transactions on Communications*, Vol. COM-29, No. 6, June 1981, pp. 895 – 901.
- [Sass82] P. F. Sass, "Army Spread Spectrum-Evolution or Revolution," *Proceedings of MILCOM '82*, pp 4.1.1-8, Boston, MA, Oct.1982
- [ShTo85] N. Shacham and J. D. Tornow, "Future Directions in Packet Radio Technology," *Proceedings of INFOCOM '85*, April 1985, pp. 93 – 98.
- [SiKl83a] J. A. Silvester and L. Kleinrock, "On the Capacity of Multiple Slotted ALOHA Networks with Regular Structure," *IEEE Transactions on Communications*, Vol. COM-31, No. 8, August 1983, pp. 974 – 982.
- [SiKl83b] J. A. Silvester and L. Kleinrock, "On the Capacity of Single-Hop Slotted ALOHA Networks for Various Traffic Matrices and Transmission Strategies," *IEEE Transactions on Communications*, Vol. COM-31, No. 8, August 1983, pp. 983 – 991.
- [SiLe83] J. A. Silvester and I. Lee, "Throughput/Delay Performance of Multi-Hop Slotted ALOHA Networks," Technical Report CSI-83-09-01, University of Southern California, September 1983.
- [SiOmScLe85] M. K. Simon, J. K. Omura, R. A. Scholtz and B. K. Levitt, *Spread Spectrum Communications*, Computer Science Press, 1985.
- [StFo89] J. S. Storey and F. A. Tobagi, "Throughput Performance of an Unslotted Direct-Sequence SSMA Packet Radio Network," *IEEE Transactions on Communications*, Vol. 37, No. 8, August 1989, pp. 814 – 823.
- [SuLi84] Szu-Lin Su and V. O. K. Li, "Performance Analysis of a Slotted Code Division Multiple Access (CDMA) Network," *Proceedings of MILCOM '84*, pp. 23.3.1-5, Los Angeles, CA, October 1984.
- [SuLi85] Szu-Lin Su and V. O. K. Li, "An Iterative Model to Analyze Multihop Packet Radio Networks," *Proc. 23rd Allerton Conference on Communication, Control and Computing*, October 1985, Monticello, Illinois.